

Part number:

053-10112

HYDROMA
HYDRAULICKÉ SYSTÉMY

HIDROMA
SISTEMS
UKŁADY HYDRAULICZNE

HYDROMA
ГИДРАВЛИЧЕСКИЕ СИСТЕМЫ

Catalogue HY10-4004/UK

Accessories

Accumulator Range + Accessories

Safety Blocks

Parker Olaer has developed a complete range of decompressing and isolating blocks (sizes 10 to 50) to answer all standard and special applications.


These blocks are in conformity with the European Directive on the equipment under pressure (97/23), these appliances have been designed to group together in a single compact unit all the components necessary for the correct operation of a hydraulic system equipped with hydropneumatic accumulators.

The basic block consists of :


- Isolating valve to isolate the accumulator from the circuit for all the blocks except from model DI 10 where it also ensures the decompression function.
- A drain valve for decompressing the accumulator for all models (except DI 10)
- A pressure limiting valve EC with poppet calibrated generally to the maximum service pressure of the accumulator (under no circumstances must this appliance be used to protect the hydraulic pump)
- Pressure tapping port (M)

In the E version, the basic block, to decompress the accumulator, can be equipped with an electro-valve :

- 2 ways 2 positions (DI 10/DI 20/DI 32) cartridge type.
- 3 ways 2 positions (DI 16/DI 24) with impact of connection according to DIN 24340 Form A, ISO 4401 and CETOP RP 121 H.

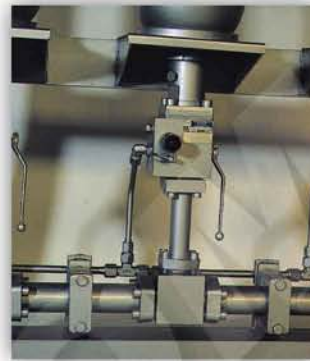

DI Series: How to order a Safety Block

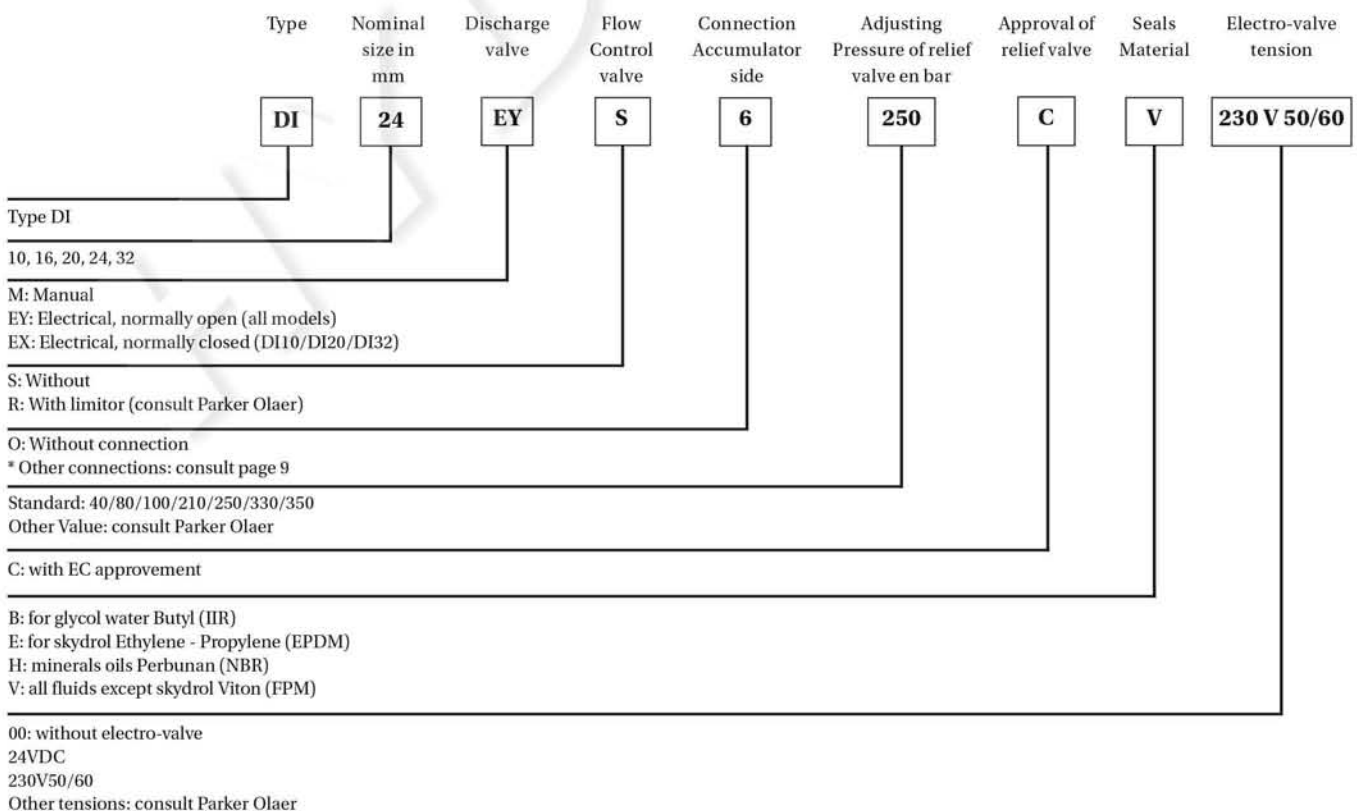

Safety Block DI 10 Manual Version

Standard version (Carbon steel, rings NBR) temperature -10°C up to 70°C Maximum working pressure : 400 Bar
According to PED 97/23/EC

Part numbers

Connecting to accumulator	Type	Part number
EHV 0.5 to 1.6 L G3/4*	DI10MS/2/350CH *	35172112Y01
EHV 10 to 50 L G2"	DI10MS/3/330CH *	35172113J01
ELM G1/2"	DI10MS/4/100CH	35172114D01
ELM G1/2"	DI10MS/4/140CH	35172114Q01
ELM G1/2"	DI10MS/4/210CH	35172114G01
ELM G1/2"	DI10MS/4/250CH	35172114H01
ELM G1/2"	DI10MS/4/330CH	35172114J01
ELM G1/2"	DI10MS/4/350CH	35172114Y01
ELM 0,32-210 G1/2"	DI10MS/5/210CH	35172115G01
ELM 0,075-250/0,16-250 G1/2"	DI10MS/5/250CH	35172115H01
ELM G3/4"	DI10MS/6/100CH	35172116D01
ELM G3/4"	DI10MS/6/140CH	35172116Q01
ELM G3/4"	DI10MS/6/210CH	35172116G01
ELM G3/4"	DI10MS/6/250CH	35172116H01
ELM G3/4"	DI10MS/6/330CH	35172116J01
ELM G3/4"	DI10MS/6/350CH	35172116Y01

* without electro-valve

Safety Block DI 10 Electrical Version

Standard version (Carbon steel, rings NBR) temperature -10°C up to 60°C Maximum working pressure : 350 Bar
According to PED 97/23/EC

Part numbers

Connecting to accumulator	With Electro-valve tension 24VDC		With Electro-valve tension 230V50/60	
	Type	Part number	Type	Part number
EHV 2.5 to 10 L (long) G1 1/4"	DI10EYS/1/350CH24VCC	35172131Y21	DI10EYS/1/350CH230V50/60	35172131Y61
EHV 0.5 to 1.6 L G3/4"	DI10EYS/2/350CH24VCC	35172132Y21	DI10EYS/2/350CH230V50/60	35172132Y61
ELM G1/2"	DI10EYS/4/100CH24VCC	35172134D21	DI10EYS/4/100CH230V50/60	35172134D61
ELM G1/2"	DI10EYS/4/140CH24VCC	35172134Q21	DI10EYS/4/140CH230V50/60	35172134Q61
ELM G1/2"	DI10EYS/4/210CH24VCC	35172134G21	DI10EYS/4/210CH230V50/60	35172134G61
ELM G1/2"	DI10EYS/4/250CH24VCC	35172134H21	DI10EYS/4/250CH230V50/60	35172134H61
ELM G1/2"	DI10EYS/4/330CH24VCC	35172134J21	DI10EYS/4/330CH230V50/60	35172134J61
ELM G1/2"	DI10EYS/4/350CH24VCC	35172134Y21	DI10EYS/4/350CH230V50/60	35172134Y61
ELM 0.32 to 210 G1/2"	DI10EYS/5/210CH24VCC	35172135G21	DI10EYS/5/210CH230V50/60	35172135G61
ELM 0.075 to 250/0.16 to 250 G1/2"	DI10EYS/5/250CH24VCC	35172135H21	DI10EYS/5/250CH230V50/60	35172135H61
ELM G3/4"	DI10EYS/6/100CH24VCC	35172136D21	DI10EYS/6/100CH230V50/60	35172136D61
ELM G3/4"	DI10EYS/6/140CH24VCC	35172136Q21	DI10EYS/6/140CH230V50/60	35172136Q61
ELM G3/4"	DI10EYS/6/210CH24VCC	35172136G21	DI10EYS/6/210CH230V50/60	35172136G61
ELM G3/4"	DI10EYS/6/250CH24VCC	35172136H21	DI10EYS/6/250CH230V50/60	35172136H61
ELM G3/4"	DI10EYS/6/330CH24VCC	35172136J21	DI10EYS/6/330CH230V50/60	35172136J61
ELM G3/4"	DI10EYS/6/350CH24VCC	35172136Y21	DI10EYS/6/350CH230V50/60	35172136Y61

Options or Accessories

Type	Characteristics	Part number
RELIEF VALVE CE	100 BAR	35045931002
RELIEF VALVE CE	140 BAR	35045931402
RELIEF VALVE CE	210 BAR	35045932102
RELIEF VALVE CE	250 BAR	35045932502
RELIEF VALVE CE	330 BAR	35045933302
RELIEF VALVE CE	350 BAR	35045933502



Safety Block DI 16 Manual Version

Standard version (Carbon steel, rings NBR) temperature -15°C up to 80°C Maximum working pressure : 350 Bar
According to PED 97/23/EC

Part numbers

Connecting to accumulator	Type	Part number
EHV 0,5 up to 1,6 L G3/4"	DI16MS/2/210 CV	35128812G02
EHV 0,5 up to 1,6 L G3/4"	DI16MS/2/250 CV	35128812H02
EHV 0,5 up to 1,6 L G3/4"	DI16MS/2/330 CV	35128812J02
EHV 0,5 up to 1,6 L G3/4"	DI16MS/2/350 CV	35128812Y02
EHV 2,5 up to 10 L G1"1/4	DI16MS/1/210 CV	35128811G02
EHV 2,5 up to 10 L G1"1/4	DI16MS/1/250 CV	35128811H02
EHV 2,5 up to 10 L G1"1/4	DI16MS/1/330 CV *	35128811J02
EHV 2,5 up to 10 L G1"1/4	DI16MS/1/350 CV *	35128811Y02
EHV 10 up to 50 L G2"	DI16MS/3/210 CV	35128813G02
EHV 10 up to 50 L G2"	DI16MS/3/250 CV	35128813H02
EHV 10 up to 50 L G2"	DI16MS/3/330 CV *	35128813J02
EHV 10 up to 50 L G2"	DI16MS/3/350 CV	35128813Y02

* without electro-valve

Safety Block DI 16 Electrical Version

Standard version (Carbon steel, rings FKM) temperature -15°C up to 60°C Maximum working pressure : 350 Bar
According to PED 97/23/EC

Part numbers

Connecting to accumulator	With Electro-valve tension 24VDC	
	Type	Part number
EHV 0,5 up to 1,6 L G3/4"	DI16EYS/2/210 CV	35128832G02
EHV 0,5 up to 1,6 L G3/4"	DI16EYS/2/250 CV	35128832H02
EHV 0,5 up to 1,6 L G3/4"	DI16EYS/2/330 CV	35128832J02
EHV 0,5 up to 1,6 L G3/4"	DI16EYS/2/350 CV	35128832Y02
EHV 2,5 up to 10 L G1"1/4	DI16EYS/1/210 CV	35128831G02
EHV 2,5 up to 10 L G1"1/4	DI16EYS/1/250 CV	35128831H02
EHV 2,5 up to 10 L G1"1/4	DI16EYS/1/330 CV	35128831J02
EHV 2,5 up to 10 L G1"1/4	DI16EYS/1/350 CV	35128831Y02
EHV 10 up to 50 L G2"	DI16EYS/3/210 CV	35128833G02
EHV 10 up to 50 L G2"	DI16EYS/3/250 CV	35128833H02
EHV 10 up to 50 L G2"	DI16EYS/3/330 CV	35128833J02
EHV 10 up to 50 L G2"	DI16EYS/3/350 CV	35128833Y02

Options or Accessories

Type	Electro valve tension	Part number
ELECTRO-VALVE T3	24 VCC	35157700281
ELECTRO-VALVE T3	110/120VA 50/60 Hz	35157800281
ELECTRO-VALVE T3	220/230VA 50/60 Hz	35157900281
REGULATION BLOCK	R16	35141800281
FLANGE M 3/4" GAS CYL Connection Accumulator Side		35054100281
FLANGE M 1"1/4 GAS CYL Connection Accumulator Side		35054200281
FLANGE M 2" GAS CYL Connection Accumulator Side		35103500281
RELIEF VALVE CE	210	35045732102
RELIEF VALVE CE	250	35045732502
RELIEF VALVE CE	330	35045733302
RELIEF VALVE CE	350	35045733502



Safety Block DI 20 Manual Version

Standard version (Carbon steel, rings NBR) temperature -10°C up to 70°C Maximum working pressure : 400 Bar
According to PED 97/23/EC

Part numbers

Connecting to accumulator	Type	Part number
EHV 2,5 up to 10 L G1"1/4	DI20MS/1/350CH	35172211Y01
EHV 10 up to 50 L G2"	DI20MS/3/330CH	35172213J01

Safety Block DI 20 Electrical Version

Standard version (Carbon steel, rings NBR) temperature -10°C up to 60°C Maximum working pressure : 350 Bar
According to PED 97/23/EC

Part numbers

Connecting to accumulator	With Electro-valve tension 24VDC		With Electro-valve tension 230V5/60	
	Type	Part number	Type	Part number
EHV 2,5 up to 10 L G1"1/4	DI20EYS/1/350CH24VCC	35172231Y21	DI20EYS/1/350CH230V50/60	35172231Y61
EHV 10 up to 50 L G2"	DI20EYS/3/210CH24VCC	35172233G21	DI20EYS/3/210CH230V50/60	35172233G61
EHV 10 up to 50 L G2"	DI20EYS/3/250CH24VCC	35172233H21	DI20EYS/3/250CH230V50/60	35172233H61
EHV 10 up to 50 L G2"	DI20EYS/3/330CH24VCC	35172233J21	DI20EYS/3/330CH230V50/60	35172233J61
EHV 10 up to 50 L G2"	DI20EYS/3/350CH24VCC	35172233Y21	DI20EYS/3/350CH230V50/60	35172233Y61

Options or Accessories

Type	Characteristics	Part number
RELIEF VALVE CE	210 BAR	35045932102
RELIEF VALVE CE	250 BAR	35045932502
RELIEF VALVE CE	330 BAR	35045933302
RELIEF VALVE CE	350 BAR	35045933502



Safety Block DI 24 Manual Version

Standard version (Carbon steel, rings FKM) temperature -15°C up to 80°C Maximum working pressure : 350 Bar
According to PED 97/23/EC

Part numbers

Connecting to accumulator	Type	Part number
EHV 2,5 up to 10 L G1"1/4	DI24MS/1/330CV	35129011J02
EHV 2,5 up to 10 L G1"1/4	DI24MS/1/350CV	35129011Y02
EHV 10 up to 50 L G2"	DI24MS/3/210CV	35129013G02
EHV 10 up to 50 L G2"	DI24MS/3/250CV *	35129013H02
EHV 10 up to 50 L G2"	DI24MS/3/330CV *	35129013J02
ACCU PISTON 10 up to 50 L G2"&EBV 100 and 200 L	Consult Parker Olaer	

* without electro-valve

Safety Block DI 24 Electrical Version

Standard version (Carbon steel, rings FKM) temperature -15°C up to 60°C Maximum working pressure : 350 Bar
According to PED 97/23/EC

Part numbers

Connecting to accumulator	With Electro-valve tension 24VDC	
	Type	Part number
EHV 2,5 up to 10 L G1"1/4	DI24EYS/1/210CV	35129031G02
EHV 2,5 up to 10 L G1"1/4	DI24EYS/1/250CV	35129031H02
EHV 2,5 up to 10 L G1"1/4	DI24EYS/1/330CV	35129031J02
EHV 2,5 up to 10 L G1"1/4	DI24EYS/1/350CV	35129031Y02
EHV 10 up to 50 L G2"	DI24EYS/3/210CV	35129033G02
EHV 10 up to 50 L G2"	DI24EYS/3/250CV	35129033H02
EHV 10 up to 50 L G2"	DI24EYS/3/330CV	35129033J02
PISTON ACCUMULATOR 10 up to 50 L G2"&EBV 100 and 200 L	Consult Parker Olaer	

Options or Accessories

Type	Electro valve tension	Part number
ELECTRO-VALVE T3	24 VCC	35157700281
ELECTRO-VALVE T3	110/120 V 50/60 Hz	35157800281
ELECTRO-VALVE T3	220/230 V 50/60 Hz	35157900281
REGULATION BLOCK	R24	35067500281
FLANGE M 1"1/4 GAZ CYL CONNECTION ACCUMULATOR SIDE		10436600281
FLANGE M 2" GAZ CYL CONNECTION ACCUMULATOR SIDE		35037500281
RELIEF VALVE CE	210 BAR	35045932102
RELIEF VALVE CE	250 BAR	35045932502
RELIEF VALVE CE	330 BAR	35045933302
RELIEF VALVE CE	350 BAR	35045933502

